

INDUSTRIAL-OTR TIRES



 **starmaxx**
IND - OTR TIRES

RANGE OF STARMAXX

INDUSTRIAL-OTR TIRES

DESCRIPTION

- For load capacity and inflating pressure figures on different speed rates, please consult the producer company.
- Our company is entitled to change any information in this brochure without prior notice.
- This brochure overrides any previous documents.
- All figures are for reference and our company cannot be deemed responsible for printing errors.
- The visual content of this brochure is only representative. To find the compatible tire for your vehicle, please refer to the vehicle service or authorized tire dealer.

RADIAL IND-OTR TIRES

RADIAL INDUSTRIAL TRACTION



StxND31 (R-4)



StxND33 (R-4)



StxRD22 (G-2)



StxRD33 (L-3/G-3)



StxRD31 (E-3/L-3)

GRADER RADIAL

LOADER
GRADER RADIAL

EARTHMOVER
LOADER RADIAL

LOADER RADIAL



StxRD31 (L-3)



StxRD31 (L-3)

FORKLIFT



SM-F20
(PNEUMATIC)



SM-F30
(PNEUMATIC)



SM-F40
(PNEUMATIC)



SOLIDMAX N
(SOLID)

COMPACTOR

SKID STEER

INDUSTRIAL



SM-S2 (R-3)



SM-C1 (C-1)



SM-ND (R-4)



SM-I35



TR-45 (F-3)

INDUSTRIAL TRACTION



SM-I30 (R-4)



SM-ND (R-4)



SM-I25 (R-4)



TR-60 (I-3)



SM-5 (R-1)



SM-PL (L-2)

EXCAVATOR

GRADER

EARTHMOVER



SM-38 (E-3)



SG-200 (G-2)



SG-300 (G-2)



SM-E3 (E-3)



SM-60 (E-3)

LOADER



SM-57 (L-3)



SM-60 (L-3)



SM-70 (L-3)



SM-70 (L-4)

PORT APPLICATION



C+STACKER (L-4)



C+STACKER SMOOTH (L-4S)

It's hard to be

That is why we produce the best of



Strong, durable, affordable off road tires.

in your shoes.

ff road tires for you.



 **starmaxx**
IND - OTR TIRES

StxND31 (R-4)

StxND31 (R-4) tire has strong radial casing and steel belted construction. It is developed for construction equipment to be used in the areas of agriculture and construction. The directional tread pattern provides excellent traction, longevity, resistance to damage and high carrying capacity. StxND31 (R-4) is the right response to agro-industrial heavy-duty needs. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders.



TYRE SIZE	TT/TL	LOAD INDEX	SPEED INDEX
400/70 R20	TL	149	A8/B
340/80 R18 (12.5/80 R18)	TL	143	A8/B
340/80 R20 (12.5 R20)	TL	138	A8/B
340/80 R20 (12.5 R20)	TL	144	A8/B
440/80 R28 (16.9 R28)	TL	156	A8/B
480/80 R26 (18.4 R26)	TL	167	A8/B
405/70 R20 (16.0/70 R20)	TL	149	A8/B
460/70 R24 (17.5L R24)	TL	159	A8/B



StxND33 (R-4)

StxND33 (R-4) is developed and designed to offer perfect traction and long life for compact industrial vehicles such as compact loaders, backhoe loaders and telehandlers. Deep and wide lugs are carefully located on the tread to ensure perfect traction on hard or soft terrains. The wide tread profile provides a balanced feel on every condition and increases the tire's service life by avoiding irregular wear. Reinforced sidewalls offer maximum resistance against cuts and puncture while the steel belts under the tread improve the tire's durability and load capacity



TYRE SIZE	TT/TL	LOAD INDEX	SPEED INDEX
460/70 R24 (17.5LR24)	TL	159/159	A8/B



StxRD22 (G-2)

StxRD22 (G-2) is an all steel radial tire that promises resistance to tears and wears in worksites and on challenging roads. Specially formulated tread compound and all steel carcass structure of StxRD22 (G-2) offer longevity. The non-directional pattern design delivers outstanding traction and grip in demanding conditions. StxRD22 (G-2) is designed especially for grader applications.



TYRE SIZE	STAR RATING	TT/TL	LOAD INDEX	SPEED INDEX
14.00 R24	★	TL	153	A8



StxRD33 (L-3/G-3)

StxRD33 (L-3/G-3) is an all steel radial tire suitable for loader and grader applications. Delivers optimized performance on all grounds. The compound and the aggressive design of the tread pattern enhance handling throughout the tire’s exceptional service life. Offers outstanding resistance against cuts and wears. StxRD33 is the ultimate choice when traction is the priority.



TYRE SIZE	STAR RATING	TT/TL	LOAD INDEX	SPEED INDEX
17.5 R25	★	TL	176/153	A2/A8



StxRD31 (E-3 / L-3)

StxRD31 (E-3 / L-3) is an all steel radial OTR tire that offers ultimate resistance to all kind of damage and is designed to be used on loaders and articulated trucks.

Demonstrates efficient self-cleaning feature thanks to its special grooving geometry. Inter-located blocks keep their integrity on all kind of grounds. Specially designed tread compound minimizes cuts and punctures on semi rough ground conditions while simultaneously reducing heat generation to boost service life and improve wear performance.



TYRE SIZE	STAR RATING	TT/TL	LOAD INDEX	SPEED INDEX
17.5 R25 4STD	★★	TL	182/167	A2 / B
20.5 R25 3 STD / 4 STD	★★	TL	193/177	A2 / B
23.5 R25 3 STD / 4 STD	★★	TL	201/185	A2 / B
26.5 R25 3 STD / 4 STD	★★	TL	209/193	A2 / B
29.5 R25 3 STD / 4 STD / 5 STD	★★	TL	216/200	A2 / B

3 STD / 4 STD / 5 STD refers to compound & carcass type



StxRD31 (L-3)

StxRD31 (L-3) is an all steel radial OTR tire resistant to all kind of damages, designed to be used on loader applications. Demonstrates efficient self-cleaning feature thanks to its special grooving geometry. Inter-connected blocks keep their integrity on all kind of grounds. Tread compound is specifically designed to work perfectly on semi-rough ground conditions and tough terrains as well, providing excellent wear performance and high resistance against cuts, chips and heat on challenging operating conditions.



TYRE SIZE	STAR RATING	TT/TL	LOAD INDEX	SPEED INDEX
17.5 R25 3STD	★★	TL	182	A2
20.5 R25 3 STD / 4 STD	★★	TL	193	A2
23.5 R25 3 STD / 4 STD	★★	TL	201	A2
26.5 R25 3 STD / 4 STD	★★	TL	209	A2
17.5 R25 4 STD	★	TL	176/153	A2/A8

3 STD / 4 STD / 5 STD refers to compound & carcass type



StxRD31 (L-3)

StxRD31 (L-3) is an all steel radial tire designed to be used on loader applications. Demonstrates efficient self-cleaning feature thanks to its special grooving geometry. Inter-connected blocks keep their integrity on all kind of grounds. Offers outstanding cut-chip and wear resistance for a variety of harsh operating conditions thanks to its special compound that is durable towards extremely tough terrains.



TYRE SIZE	STAR RATING	TT/TL	LOAD INDEX	SPEED INDEX
20.5 R25	★★	TL	193	A2
23.5 R25	★★	TL	201	A2
26.5 R25	★★	TL	209	A2
29.5 R25	★★	TL	216	A2



SM-F20 (PNEUMATIC)

SM-F20 (PNEUMATIC) is designed for general purpose tasks. Its strong carcass structure and bead construction provide high performance and durability against impacts.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
23x5-13	10	TT	121	A5
4.00-8	8	TT	94	A5
5.00-8	10	TT	111	A5
18x7-8	16	TT	125	A5
6.00-9	12	TT	121	A5
21x8-9	14	TT	131	A5
6.50-10	12	TT	125	A5
23x9-10	20	TT	142	A5
7.00-12	14	TT	134	A5
27x10-12	14	TT	143	A5
8.15-15	14	TT	146	A5
8.25-15	16	TT	152	A5



SM-F30 (PNEUMATIC)

SM-F30 (PNEUMATIC) delivers high maneuverability thanks to its reinforced tread block pattern. Offers high performance on the field with its strong carcass structure and reinforced bead design. Provides excellent durability feature and resistance against cuts and wears.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
23x5-(13)	10	TT	121	A5
4.00-8	8	TT	94	A5
5.00-8	10	TT	111	A5
16x6-8	16	TT	113	A5
18x7-8	16	TT	125	A5
6.00-9	12	TT	121	A5
21x8-9	14	TT	131	A5
6.50-10	12	TT	125	A5
23x9-10	20	TT	142	A5
7.00-12	14	TT	134	A5
27x10-12	14	TT	143	A5
7.50-15	14	TT	144	A5
8.15-15	14	TT	146	A5
250-15	20	TT	155	A5
300-15	20	TT	164	A5



SM-F40 (PNEUMATIC)

SM-F40 offers ultimate durability with its extra tread depth. Center reinforced block structure provides exceptional maneuverability especially while spot turnings. Resistant to cuts and chunking thanks to its strong carcass structure.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
6.00-9	12	TT	121	A5
6.50-10	12	TT	125	A5
7.00-12	14	TT	134	A5
8.15-15	14	TT	146	A5
8.25-15	16	TT	152	A5



SOLIDMAX N (SOLID)

SOLIDMAX N (SOLID) is developed to offer extended service life and minimized maintenance costs for forklifts operating on even surfaces. The premium rubber compound provides excellent wear behavior and extreme resistance to cuts, chips and wear. The cushion layer ensures that toughness does not lead to compromises on operator's comfort and forklift's service life. Steel bead wires embedded in the hard base compound guarantees integrity by preventing the tire from rotating on the rim.



TYRE SIZE	RIM	LOAD INDEX	SPEED INDEX
6.50-10	5.00F-10	128	A5
23x10-12⁽³⁾	8.00G-12	145	A5

UNDER DEVELOPMENT

18x7-8

4,00-8

(1) Represents the maximum speed of the unladen vehicle.

(2) It is a product with self-segmented heel structure.

(3) The equivalent of (23) 23x10-12 in metric system is 250 / 60-12.



SM-S2 (R-3)

SM-S2 (R-3) is designed for compactors applications. It delivers high impact resistance when used in paving applications. Thanks to its strong carcass structure it offers longevity.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
23.1-26	10	TT	158	A8
23.1-26	12	TL	162	A8
23.1-26	14	TL	166	A8



SM-C1 (C-1)

Suitable to use for industrial compacting roadbeds and rolling asphalt. Heat resistant smooth pattern design distribute the pressure equally towards the road. Delivers high mileage performance and comfort riding.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
11.00-20	14	TT	165	A2
13.0/80 R20	-	TL	164	A3



SM-ND (R-4)

Designed for general purpose use in construction applications. Delivers exceptional traction thanks to its directional pattern design and robust lugs. Strong carcass structure enhances resistance to cuts, tears and wears. Offers outstanding cost efficiency.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
10-16,5 NHS	8	TL	131	A3
12-16,5 NHS	10	TL	142	A3



SM-I35

Skid steer tire solution for harsh, off-road applications. Delivers enhanced durability, traction and side impact resistance for excellent value, performance and low operating costs.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
10-16.5 NHS	12	TL	138	A3
12-16.5 NHS	14	TL	147	A3



TR-45 (F-3)

It is developed for front axles of 2WD industrial tractors and compact earthmovers for the purpose of usage in agricultural areas and worksites. Moreover, it is multi-purpose, low-profile tire that can be used on trailers for on or off road. It provides resistance and longevity against to tears and wears on hard soil, asphalt, and concrete with its specially formulated tread compound and reinforced carcass structure.



TYRE SIZE	TT/TL	LOAD INDEX	SPEED INDEX
11L-16 SL	TL	116	A8



SM-I30 (R-4)

SM-I30 (R-4) is an R-4 pattern designed to provide ultimate traction and durability for compact loaders, backhoe loaders and telehandlers. Wide and deep lugs are purposefully located to maximize traction on challenging terrains and ensure maximum durability against cuts and damages. Guarantees consistent performance throughout the tire's long lifespan with wide tread profile that improves the tire's resistance against irregular wear. The number and angles of undertread plies are specifically determined to improve lateral stability.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
16.0/70-20	16	TL	156	A8



SM-ND (R-4)

SM-ND (R-4) is specially designed for general purpose use in construction applications. Delivers exceptional traction thanks to its directional pattern design and robust lugs. Strong carcass structure enhances resistance to cuts, tears and wears. Delivers cost effectiveness.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
10.5/80-18	12	TL	134	A8
280/80-18	12	TL	134	A8
10.0/75-15.3	12	TL	126	A8
11.5/80-15.3	12	TL	135	A8
405/70-20	14	TL	154	A8
16.0/70-20	14	TL	154	A8
16.0/70-24	14	TL	152	B
405/70-24	14	TL	152	B
14.5-20	14	TT	143	D
14.5-20	14	TL	143	D
480/80-26	12	TL	156	A8
23.1-26	14	TL	166	A8



SM-I25 (R-4)

Specially designed for backhoe and telehandler applications. Offers ultimate resistance to cuts, tears, chips and chunks with its exceptional tread compound and wide lugs. Strong carcass structure ensures longevity.



TYRE SIZE	PR	TT/ TL	LOAD INDEX	SPEED INDEX
12.5/80-18	14	TL	146	A8
340/80-18	12	TL	142	A8
405/70-20	14	TL	154	A8
16.0/70-20	14	TL	154	A8
16.0/70-20	16	TL	156	A8
16.0/70-24	14	TL	152	B
405/70-24	14	TL	152	B
14.5-20	14	TT	143	D
14.5-20	14	TL	143	D
19.5L-24	12	TL	151	A8
440/80-24	12	TL	149	A8

TYRE SIZE	PR	TT/ TL	LOAD INDEX	SPEED INDEX
16.9-24	12	TL	149	A8
16.9-24	14	TL	152	A8
16.5/85-24	12	TL	149	A8
16.5/85-24	16	TL	156	A8
16.9-28	12	TT	152	A8
16.5/85-28	12	TL	152	A8
16.9-28	14	TL	156	A8
440/80-28	12	TL	152	A8
480/80-26	14	TL	158	A8
18.4-26	12	TL	156	A8
18.4-26	14	TL	158	A8
18.4-26	16	TL	160	A8



TR-60 (I-3)

TR-60 (I-3) tire designed for heavy duty tractor applications. Reinforced carcass structure provides exceptional durability and ensures longevity. Features excellent self-cleaning properties and outstanding grip in challenging off the road conditions. The tread pattern provides excellent stability during operations.



TYRE SIZE	PR	TT/TL	LOAD INDEX		SPEED INDEX
15.5/80-24	12	TL	157	145	A8
15.5/80-24	16	TL	163	151	A8



SM-5 (R-1)

Suitable for small loader, backhoe and telehandler applications. The special tread design offers exceptional traction. Offers outstanding durability thanks to its special compound.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
18.4-26	14	TL	145	A8
16.9-30	14	TL	153	A8



SM-PL (L-2)

The ideal tire for compact machinery applications. Deep tread depth and directional tread pattern enhance traction in challenging off the road conditions. Offers excellent self-cleaning feature with its special lug design.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
15.5-25	12	TL	149	B



SM-38 (E-3)

SM-38 (E-3) is specially developed for road construction excavators. Its aggressive tread pattern delivers outstanding traction and enables excellent self-cleaning. Promises high resistance to cuts and tears and thus, ensures longevity thanks to its reinforced carcass structure.



TYRE SIZE	PR	TT/TL	LOAD INDEX		SPEED INDEX
7.50-20	10	TT	123	122	B
9.00-20	14	TT	140	137	B
10.00-20	16	TT	146	143	B



SG-200 (G-2)

Specially designed for grader and construction machinery applications. Offers excellent durability thanks to its solid tread center structure. Strong nylon carcass structure promises resistance against cuts, chunks and tears. Delivers outstanding traction in challenging conditions with its open shoulders.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
13.00-24	12	TT	143	A8
13.00-24	12	TL	143	A8
13.00-24	16	TT	151	A8
13.00-24	16	TL	151	A8
14.00-24	16	TT	153	A8
14.00-24	16	TL	153	A8



SG-300 (G-2)

Designed for grader and construction machinery applications. Special tread compound increases service life and improves cut resistance. Delivers enhanced durability, traction and side impact resistance and reduces operating costs. Strengthened bead and body structure makes it suitable for being retreaded.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
16.00-24	16	TL	160	A8



SM-E3 (E-3)

Offers reliable performance in challenging off road conditions. Ensures resistance against chips and chunks thanks to its durable nylon carcass construction. Massive cross lugs and provides excellent traction with wide ground contact.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
14.00-24	16	TT	153	D
14.00-24	20	TL	157	D
14.00-24	24	TT	160	D
14.00-24	28	TT	168	D
14.00-24	28	TL	168	D
14.00-24	32	TT	170	D
14.00-24	32	TL	170	D



SM-60 (E-3)

Delivers outstanding grip in construction sites thanks to its non-directional tread pattern design. The tread compound improves cut and chip resistance. Offers ultimate durability thanks to solid tread center structure and strong nylon carcass.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
16.00-25	32	TL	177	B
18.00-25	32	TL	183	B
18.00-25	40	TL	187	B
18.00-33	32	TL	188	B



SM-57 (L-3)

Offers reliable performance in difficult off road conditions. Its durable nylon carcass construction resistant against chips and chunks. Suitable to use earthmover applications. Massive cross lugs and wide ground contact provide excellent traction.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
17.5-25	12	TL	171	A2
17.5-25	16	TT	177	A2
17.5-25	16	TL	177	A2
17.5-25	20	TL	181	A2
20.5-25	16	TL	181	A2
20.5-25	20	TL	186	A2
20.5-25	24	TL	196	A2
23.5-25	20	TL	191	A2
23.5-25	24	TL	196	A2



SM-60 (L-3)

Delivers outstanding grip in construction sites thanks to its non-directional tread pattern design. The tread compound ensures excellent cut and chip resistance. Provides outstanding durability thanks to its solid tread center structure and strong nylon carcass.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
17.5-25	16	TL	177	A2
20.5-25	20	TL	186	A2
23.5-25	20	TL	191	A2
23.5-25	24	TL	196	A2
26.5-25 (CR)	28	TL	203	A2
26.5-25 (CR)	32	TL	206	A2
29.5-25 (CR)	28	TL	207	A2
29.5-25 (CR)	32	TL	210	A2

CR: Cut Resistance



SM-70 (L-3)

Delivers optimized performance on all terrains. The special compound and aggressive design of the tread pattern enhances handling throughout its exceptionally long life. Provides outstanding resistance to cuts and wears. Specifically designed to offer ultimate performance when excellent traction is needed.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
15.5-25	12	TL	168	A2
17.5-25	16	TL	177	A2
17.5-25	20	TL	181	A2
20.5-25	20	TL	186	A2
23.5-25	20	TL	191	A2
23.5-25	24	TL	196	A2
26.5-25 (CR)	28	TL	203	A2
26.5-25 (CR)	32	TL	206	A2
29.5-25 (CR)	28	TL	207	A2
29.5-25 (CR)	32	TL	210	A2

CR: Cut Resistance



SM-70 (L-4)

Suitable to be used in loader applications. Delivers optimized performance on all terrains. The special compound and aggressive design of the tread pattern enhances handling throughout its exceptionally long life. Provides outstanding resistance to cuts and wears. Specifically designed to offer ultimate performance when excellent traction is needed.



TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
26.5-25 (CR)	32	TL	206	A2
29.5-25 (CR)	28	TL	207	A2

CR: Cut Resistance



C+STACKER (L-4)

Specially designed for port applications. Deep and non-directional tread design delivers excellent traction and ensures long operating hours. Offers excellent durability features and high resistance against cuts, chunks and wears. Wide centerline enables riding comfort.




TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
18.00-25	40	TL	206	A2



C+STACKER SMOOTH (L-4S)

Smooth treaded tire for port applications. Optimized tread wear potential offers an exceptional longevity. Promises high stability thanks to its smooth tread design. Highly resistant to abrasion.

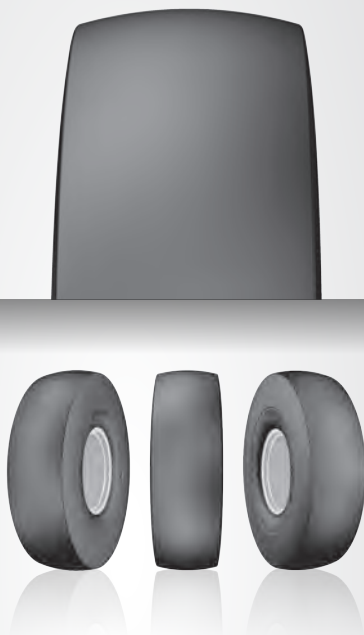

TYRE SIZE	PR	TT/TL	LOAD INDEX	SPEED INDEX
18.00-25	40	TL	206	A2



Starmaxx Industrial OTR - Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.


Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long-term relationships with our customers by providing excellent service, quality and delivering our promises.



2022 EDITION

DISTRIBUTED BY

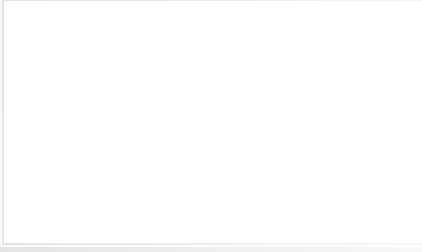

Headquarters - Factory

Petlas Tire Industry and Trade
Kindam Mahallesi Ankara-Kayseri Caddesi
No: 2/1 Kırşehir/TURKEY
T: +90 386 252 65 50 • F: +90 386 252 65 70

Int. Sales & Marketing

Petlas Tire Industry and Trade
Ako Kule, Söğütözü Mh. 2178. Cd. No: 6
06530 Ankara/TURKEY
T: +90 312 309 30 30 • F: +90 312 309 22 66

Petlas Tire USA

1111 E. Lincolnway STE 205
Cheyenne, WY 82001 USA

www.starmaxx.com

MADE IN TÜRKİYE

 **starmaxx**
IND - OTR TIRES